


3014 CCT ADJUSTABLE LED STRIP 240 LEDS/M - 5M

SPECIFICATIONS

Brand:	CDNLUX
Model:	MTL-FP10AFIDJ-240AWWPCW
Certification:	cULus E498952
Chip:	Epistar 3014 SMD
Length:	5 meters
Width:	iP20: 10mm
Chip density:	240 LED per meter, 1200 LEDs total
Beam angle:	120°
Cutline:	Each 6 LEDs (5cm)
Voltage available:	24VDC (Constant Voltage)
Required Power:	16W / meter
Recommended Power Supply:	19.2W / meter, must be powered by a class 2 power supply
Color temperature:	CCT Adjustable 2700K to 6500K
Lumens per meter:	2700K: ≈ 1050lm 4500K: ≈ 1125lm 6500K: ≈ 1200lm
CRI:	90+
Self-adhesive:	3M
Suitable environment:	iP20: Dry
Temperature:	Storage: 50°C to -40°C Operating: 50°C to -25°C
Dimmable:	Yes, with a CCT controller
Heat Dissipation:	Mandatory
Application:	Under cabinet, recessed cove lighting, shelves, etc.
Lifetime:	> 50 000 Heures



Color Temperature (Kelvin)

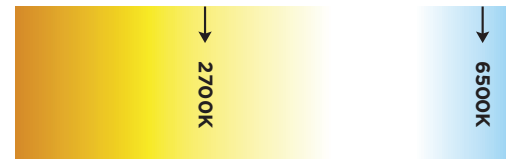

DIMENSIONS

