


3528 SINGLE COLOR 180 LEDs/M - 5M

SPECIFICATIONS

Brand:	CDNLUX
Model:	MTL-FP8AEXXX-180AXW
Certification:	cULus E498952
Chip:	Epistar 3528 SMD
Length:	5 meters
Width:	iP20: 8mm
Chip density:	180 LED per meter, 900 LEDs total
Beam angle:	120°
Cutline:	24V Each 6 LEDs (3.35cm)
Voltage available:	24V DC (Constant Voltage)
Required Power:	14.4W / meter
Recommended Power Supply:	18W / meter, must be powered by a class 2 power supply
Color temperature:	2700K / 3000K / 3500K / 4000K / 5000K
Lumens:	≈ 1050lm
CRI :	95+
Self-adhesive:	3M
Suitable environment:	iP20: Dry
Temperature:	Storage: 50°C to -40°C Operating: 50°C to -25°C
Dimmable:	Yes, through a low voltage dimmer or with a dimmable power supply
Application:	Under cabinet, recessed cove lighting, shelves, etc.
Dissipation de la chaleur:	Mandatory
Lifetime:	> 50 000 Hours



Color Temperature (Kelvin)

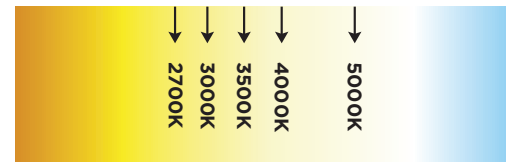

Female DC Plug (beginning) Wires Red + Black - (end)



DIMENSIONS 24V

